


Dredging of Waste water treatment ponds(Kojonup, WA) (Remote-Control Dredger)

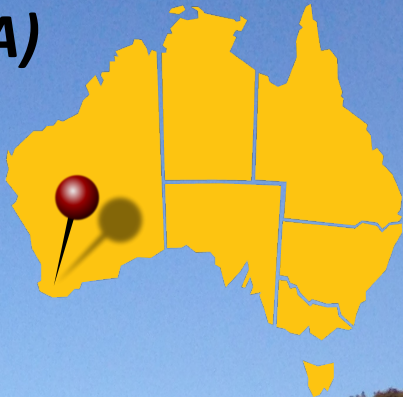

Material Pumped	Biosolid from Waste water treatment pond
Dredging Depth	< 2 m
Pump Capacity	3000 L/min (Clear water)
Slurry Ratio	20% (solids %-v)
Average slurry extraction	1770 m ³ / 10 hr
Pumping Distance	3000 L/min @ 55 m head