


Dredging of Leachate ponds(TAS) (Remote-Control Dredger)

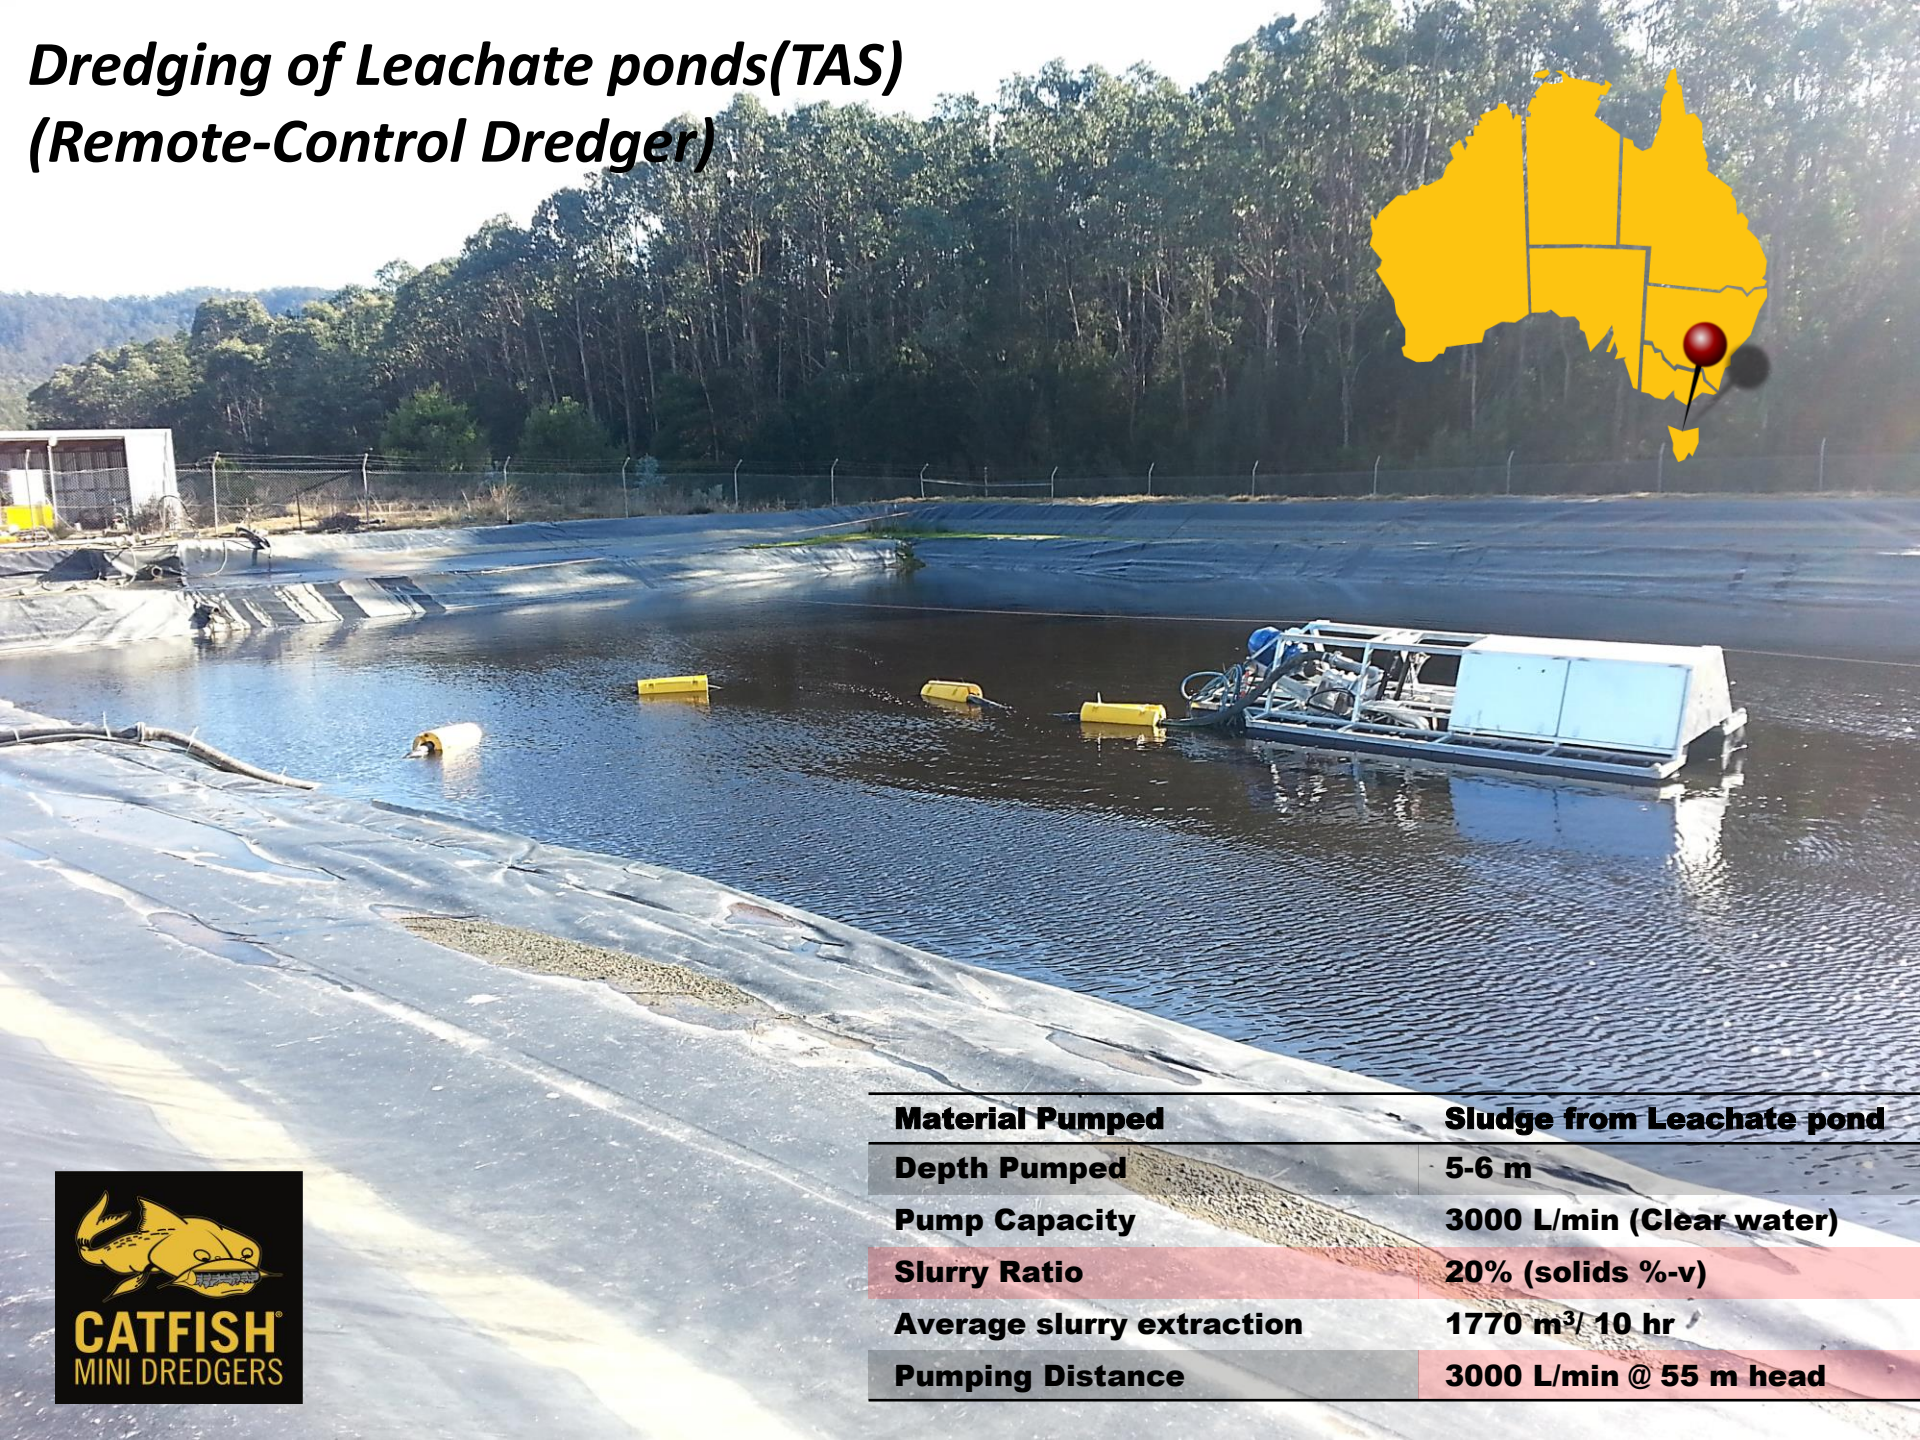

Material Pumped	Sludge from Leachate pond
Depth Pumped	5-6 m
Pump Capacity	3000 L/min (Clear water)
Slurry Ratio	20% (solids %-v)
Average slurry extraction	1770 m ³ / 10 hr
Pumping Distance	3000 L/min @ 55 m head